



# TECHNICAL STANDARDS - NAMCATS: Part 2 Units of Measurement to be used in AIR and Ground Operations

---

Document 1/1/3/1/2

ISSUE DATE 10<sup>th</sup> July 2020



Namibia Civil Aviation Authority -  
Safety Division

**TECHNICAL STANDARDS  
(NAMCATS)**  
  
**Part 2: UOM**

**1. GENERAL**

- 1.1 Section 227 of the Civil Aviation Act, 2016 (Act no. 6 of 2016 – hereinafter “the Act”) empowers the Executive Director of Civil Aviation to issue technical standards for civil aviation “on such matters as may be prescribed”. Section 227(3) of the Act further empowers the Executive Director of Civil Aviation to incorporate into a technical standard any international aviation standard or any amendment without publishing the text of such standard or any amendment “by mere reference” to the title, number and year of issue of such standard or amendment or to any other particulars by which such standard or amendment is sufficiently identified.
- 1.2 By way of Government Notice 293/2018 published in Government Gazette 6763 dated 8<sup>th</sup> November 2018, NAMCARS (2018) provides for Part 2 – “ Units of Measurement to be used in Air and Ground Operations” (UOM). This Part 2 provides for the issue of technical standards as NAM-CATS-UOM. The Executive Director of Civil Aviation has, pursuant to the empowerment mentioned above, issued technical standards relating to NAMCAR Part 2 (Units of Measurement) to be known as NAM-CATS-UOM.
- 1.3 NAM-CATS-Units of Measurement comprises the standards, rules, requirements, methods, specifications, characteristics and procedures which are applicable in respect of standard units of measurement to be used in all aspects of civil aviation air and ground operations.
- 1.4 To the extent possible, each reference to a technical standard in this document, is a reference to the corresponding regulation in the Namibian Civil Aviation Regulations.

**Example:** (1) Technical standard 2.01.2 refers to regulation 2 of Subpart 01 of the Part 2  
(2) Technical standard 2.02 refers to either the whole, or more than one specific regulation, of Subpart 02 of Part 2.



1.5 Where there is any perceived disparity of meaning or inconsistency between these technical standards and the regulations, the provisions of the regulations will take precedence.

1.6 Where there is a difference between a standard and procedure prescribed in ICAO documents and the Civil Aviation Technical Standards (CATS), the CATS standard will prevail.

**2. GUIDANCE MATERIAL**

2.1 Guidelines and recommendations in support of any particular technical standard are contained in schedules or appendices to, and/or compliance notes inserted throughout, the technical standards. These guidelines are intended to provide recommendations and guidance to illustrate a means, but not necessarily the only means of complying with the regulations and technical standards. They may explain certain regulatory requirements by providing interpretive and explanatory materials. It is expected that service providers will document internal actions in their own operational manuals, to put into effect those, or similarly adequate, practices.


**3. AMENDMENTS TO THE TECHNICAL STANDARDS**

3.1 The NCAA Safety Division ANS Safety Oversight Section (ANSSO) has responsibility for the technical content of this technical standard.

3.2 This technical standard is issued, and may only be amended, under the authority of the Executive Director of Civil Aviation.

3.3 Requests for changes to the content of this technical standard must be forwarded to the Executive Director and may come from:

- (a) technical areas within NCAA; or
- (b) aviation industry service providers or operators; or
- (c) pilots and ATC staff.

 <p><b>NCAA</b> NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p align="center"><b>Namibia Civil Aviation Authority - Safety Division</b></p>	<p align="center"><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p align="center"><b>Part 2: UOM</b></p>
---	---	---

- 3.4 The need to change the content of this technical standard may arise for any of the following reasons:
- (a) to ensure safety;
  - (b) to ensure standardisation;
  - (c) to respond to changed NCAA regulations or standards;
  - (d) to respond to changes initiated by ICAO;
  - (e) to accommodate proposed initiatives or new technologies.
- 3.5 NCAA may approve trials of new procedures or technologies to develop appropriate standards.


#### **4. INTERNATIONAL STANDARDS**

- 4.1 Section 227 of the Civil Aviation Act, 2016 empowers the Executive Director of Civil Aviation to issue technical standard for civil aviation. Section 227 of the Civil Aviation Act, 2016 further empowers the Executive Director of Civil Aviation to incorporate into a technical standard any international aviation standard or any amendment without stating the text of such standard or amendment, by mere reference to the title, number and year of issue of such standard or amendment, or to any other particulars by which such standard or amendment is sufficiently identified.
- 4.2 The following international standards, recommended practices and procedures, as amended from time to time, are incorporated into the technical standards contained in this document:
- (a) ICAO Annex 5 – Units of Measurement to be used in air and ground operations;
  - (b) ICAO Regional Supplementary Procedures (Doc 7030), as amended from time to time.
  - (c) ICAO Human Factors Manual (Doc 9683)
- 4.3 Differences from ICAO Standards, Recommended Practices and Procedures are published in the AIP.

Miscellaneous:

#### **APPENDICES**

**ATTACHMENT – A : Development of the International System of Units (SI)**

 <p>NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p>Namibia Civil Aviation Authority - Safety Division</p>	<p><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p><b>Part 2: UOM</b></p>
---	---	---

ATTACHMENT – B : **Guidance on the Application of the SI**

ATTACHMENT – C: **Conversion Factors**

ATTACHMENT – D: **Coordinated Universal Time**

ATTACHMENT – E: **Presentation of Date and Time in all-numeric form**

These Technical Standards apply with immediate effect.

Further access is available on NCAA website: [www.ncaa.com.na/resources](http://www.ncaa.com.na/resources)

Enquiries : [sos-anso@ncaa.com.na](mailto:sos-anso@ncaa.com.na)

  
**REINHARD GAERTNER**  
**INTERIM EXECUTIVE DIRECTOR**

  
NAMIBIA CIVIL AVIATION AUTHORITY  
NCAA  
15 JUL 2020  
PRIVATE BAG 12003  
KOSSPANPLATZ  
WINDHOEK  
OFFICE OF THE EXECUTIVE DIRECTOR



**Namibia Civil Aviation Authority -  
Safety Division**

**TECHNICAL STANDARDS  
(NAMCATS)  
  
Part 2: UOM**

## SCHEDULE

### PART 2 – UNITS OF MEASUREMENT TO BE USED IN AIR AND GROUND OPERATIONS (NAM-CATS-UOM)

#### List of Technical Standards

1.	GENERAL .....	<b>Error! Bookmark not defined.</b>
2.	GUIDANCE MATERIAL .....	3
3.	AMENDMENTS TO THE TECHNICAL STANDARDS.....	3
4.	INTERNATIONAL STANDARDS .....	4
Sub-Part. 1 GENERAL .....		6
2.01.1	Applicability.....	7
2.01.2	Definitions.....	7
Sub-Part 2.02. STANDARD APPLICATION OF UNITS OF MEASUREMENT.....		11
2.02.1	Standard SI Units.....	11
2.02.2	Non-SI units.....	13
2.02.5	Termination of use of Non-SI alternative units.....	18
ATTACHMENT A DEVELOPMENT OF THE INTERNATIONAL SYSTEM OF UNITS (SI) .....		19
ATTACHMENT B GUIDANCE ON THE APPLICATION OF THE SI.....		20
ATTACHMENT C CONVERSION FACTORS .....		33
ATTACHMENT D COORDINATED UNIVERSAL TIME.....		43
ATTACHMENT E PRESENTATION OF DATE AND TIME IN ALL-NUMERIC FORM .....		44



## Sub-Part 1 GENERAL

### 2.01.1 Applicability

**Compliance Note.** *This Document contains specifications for the use of a standardized system of units of measurement in international civil aviation air and ground operations. This standardized system of units of measurement is based on the International System of Units (SI) and certain non-SI units considered necessary to meet the specialized requirements of international civil aviation. See Attachment A for details concerning the development of the SI.*

The standards contained in this Document must be applicable to all aspects of international civil aviation air and ground operations.

### 2.01.2 Definitions

When the following terms are used in the regulations, they have the following meanings:

**Ampere (A).** The ampere is that constant electric current which, if maintained in two straight parallel conductors of infinite length, of negligible circular cross-section, and placed 1 metre apart in a vacuum, would produce between these conductors a force equal to  $2 \times 10^{-7}$  newton per metre of length.

**Becquerel (Bq).** The activity of a radionuclide having one spontaneous nuclear transition per second.

**Candela (cd).** The luminous intensity, in the perpendicular direction, of a surface of 1/600 000 square metre of black body at the temperature of freezing platinum under a pressure of 101 325 newtons per square metre.



**Celsius temperature ( $t^{\circ}\text{C}$ ).** The Celsius temperature is equal to the difference  $t^{\circ}\text{C} = T - T_0$  between two thermodynamic temperatures  $T$  and  $T_0$  where  $T_0$  equals 273.15 kelvin.

**Coulomb (C).** The quantity of electricity transported in 1 second by a current of 1 ampere.

**Degree Celsius ( $^{\circ}\text{C}$ ).** The special name for the unit kelvin for use in stating values of Celsius temperature.

**Farad (F).** The capacitance of a capacitor between the plates of which there appears a difference of potential of 1 volt when it is charged by a quantity of electricity equal to 1 coulomb.

**Foot (ft).** The length equal to 0.304 8 metre exactly.

**Gray (Gy).** The energy imparted by ionizing radiation to a mass of matter corresponding to 1 joule per kilogram.

**Henry (H).** The inductance of a closed circuit in which an electromotive force of 1 volt is produced when the electric current in the circuit varies uniformly at a rate of 1 ampere per second.

**Hertz (Hz).** The frequency of a periodic phenomenon of which the period is 1 second.

**Human performance.** Human capabilities and limitations which have an impact on the safety and efficiency of aeronautical operations.

**Joule (J).** The work done when the point of application of a force of 1 newton is displaced a distance of 1 metre in the direction of the force.



**Kelvin (K).** A unit of thermodynamic temperature which is the fraction  $1/273.16$  of the thermodynamic temperature of the triple point of water.

**Kilogram (kg).** The unit of mass equal to the mass of the international prototype of the kilogram.

**Knot (kt).** The speed equal to 1 nautical mile per hour.

**Litre (L).** A unit of volume restricted to the measurement of liquids and gases which is equal to 1 cubic decimetre.

**Lumen (lm).** The luminous flux emitted in a solid angle of 1 steradian by a point source having a uniform intensity of 1 candela.

**Lux (lx).** The illuminance produced by a luminous flux of 1 lumen uniformly distributed over a surface of 1 square metre.

**Metre (m).** The distance travelled by light in a vacuum during  $1/299\,792\,458$  of a second.

**Mole (mol).** The amount of substance of a system which contains as many elementary entities as there are atoms in 0.012 kilogram of carbon-12.

*Compliance Note. When the mole is used, the elementary entities must be specified and may be atoms, molecules, ions, electrons, other particles or specified groups of such particles.*

**Nautical mile (NM).** The length equal to 1 852 metres exactly.

**Newton (N).** The force which when applied to a body having a mass of 1 kilogram gives it an acceleration of 1 metre per second squared.



**Ohm ( $\Omega$ ).** The electric resistance between two points of a conductor when a constant difference of potential of 1 volt, applied between these two points, produces in this conductor a current of 1 ampere, this conductor not being the source of any electromotive force.

**Pascal (Pa).** The pressure or stress of 1 newton per square metre.

**Radian (rad).** The plane angle between two radii of a circle which cut off on the circumference an arc equal in length to the radius.

**Second (s).** The duration of 9 192 631 770 periods of the radiation corresponding to the transition between the two hyperfine levels of the ground state of the caesium-133 atom.

**S I.** The International System of Units developed and maintained by the General Conference of Weights and Measures (CGPM).

**Siemens (S).** The electric conductance of a conductor in which a current of 1 ampere is produced by an electric potential difference of 1 volt.

**Sievert (Sv).** The unit of radiation dose equivalent corresponding to 1 joule per kilogram.

**Steradian (sr).** The solid angle which, having its vertex in the centre of a sphere, cuts off an area of the surface of the sphere equal to that of a square with sides of length equal to the radius of the sphere.

**Tesla (T).** The magnetic flux density given by a magnetic flux of 1 weber per square metre.

**Tonne (t).** The mass equal to 1 000 kilograms.



**Volt (V).** The unit of electric potential difference and electromotive force which is the difference of electric potential between two points of a conductor carrying a constant current of 1 ampere, when the power dissipated between these points is equal to 1 watt.

**Watt (W).** The power which gives rise to the production of energy at the rate of 1 joule per second.

**Weber (Wb).** The magnetic flux which, linking a circuit of one turn, produces in it an electromotive force of 1 volt as it is reduced to zero at a uniform rate in 1 second.

## Sub-Part 2.02      STANDARD APPLICATION OF UNITS OF MEASUREMENT

### 2.02.1 . Standard SI Units

1.1      The International System of Units developed and maintained by the General Conference of Weights and Measures (CGPM) must, subject to the provisions of Sections 2 and 3 below, be used as the standard system of units of measurement for all aspects of civil aviation air and ground operations in Namibia.

1.2      The prefixes and symbols listed below must be used to form names and symbols of the decimal multiples and submultiples of SI units and the use of the term SI units must include base units and derived units as well as their multiples and sub-multiples.


*Compliance Note 1: As used herein the term SI unit is meant to include base units and derived units as well as their multiples and sub-multiples.*

*Compliance Note 2. See Attachment B for guidance on the general application of prefixes.*



Table 1. SI unit prefixes

<i>Multiplication factor</i>	<i>Prefix</i>	<i>Symbol</i>
1 000 000 000 000 000 000 = 10 <sup>18</sup>	exa	E
1 000 000 000 000 000 = 10 <sup>15</sup>	peta	P
1 000 000 000 000 = 10 <sup>12</sup>	tera	T
1 000 000 000 = 10 <sup>9</sup>	giga	G
1 000 000 = 10 <sup>6</sup>	mega	M
1 000 = 10 <sup>3</sup>	kilo	k
100 = 10 <sup>2</sup>	hecto	h
10 = 10 <sup>1</sup>	deca	da
0.1 = 10 <sup>-1</sup>	deci	d
0.01 = 10 <sup>-2</sup>	centi	c
0.001 = 10 <sup>-3</sup>	milli	m
0.000 001 = 10 <sup>-6</sup>	micro	μ
0.000 000 001 = 10 <sup>-9</sup>	nano	n
0.000 000 000 001 = 10 <sup>-12</sup>	pico	p
0.000 000 000 000 001 = 10 <sup>-15</sup>	femto	f
0.000 000 000 000 000 001 = 10 <sup>-18</sup>	atto	a

 <b>NCAA</b> <small>NAMIBIA CIVIL AVIATION AUTHORITY</small>	<b>Namibia Civil Aviation Authority - Safety Division</b>	<b>TECHNICAL STANDARDS (NAMCATS)</b>  <b>Part 2: UOM</b>
---	---	--

### 2.02.2 Non-SI units for permanent use with SI units

#### (1) Non-SI units for permanent use with SI

The non-SI units in Table 2 below must be used in addition to SI units as primary units of measurement but only as specified in Table 4.

**Table 2. Non SI units for use with the SI**

<i>Specific quantities</i>	<i>Unit</i>	<i>Symbol</i>	<i>Definition (in terms of SI units)</i>
mass	tonne	t	1 t = 103 kg
plane angle	Degree	°	1° = (π/180) rad
	Minute	'	1' = (1/60)° = (π/10 800) rad
	second	"	1" = (1/60)' = (π/648 000) rad
temperature	degree Celsius	°C	1 unit °C = 1 unit K <sup>a</sup>
time	minute	Min	1 min = 60 s
	hour	H	1 h = 60 min = 3 600 s
	day	D	1 d = 24 h = 86 400 s
	week, month, year	—	
volume	litre	L	1 L = 1 dm <sup>3</sup> = 10 <sup>-3</sup> m <sup>3</sup>
a) See Attachment C, Table C-2 for conversion.			

### 2.02.3 Additional Non-SI alternative units (permitted) for temporary use with the SI

- (1) Table 3 below describes non-SI units permitted for temporary use as alternative units of measurement but only for those specific quantities listed in Table 4

*Compliance Note. It is intended that the use of the non-SI alternative units listed in Table 3 and applied as indicated in Table 4 will eventually be discontinued in accordance with individual unit termination dates established by the Council of ICAO. Termination dates, when established, will be given in 2.02.5.*

**Table 3. Additional Non-SI alternative units permitted for temporary use with the SI**

<i>Specific quantities in Table 4 related to</i>	<i>Unit</i>	<i>Symbol</i>	<i>Definition (in terms of SI units)</i>
Distance (longitudinal)	nautical miles	NM	1 NM = 1 852 m
distance (vertical) <sup>a)</sup>	foot	ft	1ft = 0.3048 m
Speed	knot	kt	1kt = 0.514444 m/s
a) altitude, elevation, height, vertical speed			

#### **2.02.4 Application of specific units**

- (1) The application of units of measurement for certain quantities used in international civil aviation air and ground operations must be in accordance with Table 4 below.

*Compliance Note. Table 4 is intended to provide standardization of units (including prefixes) for those quantities commonly used in air and ground operations. Basic provisions apply for units to be used for quantities not listed.*

- (2) Means and provisions for design, procedures and training should be established for operations in environments involving the use of standard and non-SI alternatives of specific units of measurement, or the transition between environments using different units, with due consideration to human performance.

*Compliance Note. Note. Guidance material on human performance can be found in the Human Factors Training Manual (Doc 9683).*



Table 4. Standard Application of specific units of measurement

<i>Ref. No.</i>	<i>Quantity</i>	<i>Primary unit (symbol)</i>	<i>Non-SI alternative unit (symbol)</i>
<b>1. Direction/Space/Time</b>			
1.1	altitude	m	ft
1.2	area	m <sup>2</sup>	
1.3	distance (long) <sup>a)</sup>	km	NM
1.4	distance (short)	m	
1.5	elevation	m	ft
1.6	endurance	h and min	
1.7	height	m	ft
1.8	latitude	° ' "	
1.9	length	m	
1.10	longitude	° ' "	
1.11	plane angle (when required, decimal subdivisions of the degree shall be used)	°	
1.12	runway length	m	
1.13	runway visual range	m	
1.14	tank capacities (aircraft) <sup>b)</sup>	L	
1.15	time	s min h d week month year	
1.16	visibility <sup>c)</sup>	km	
1.17	volume	m <sup>3</sup>	
1.18	wind direction (wind directions other than for a landing and take-off shall be expressed in degrees true; for landing and take-off wind directions shall be expressed in degrees magnetic)	°	



**2. Mass-related**

2.1	air density	kg/m <sup>3</sup>
2.2	area density	kg/m <sup>2</sup>
2.3	cargo capacity	kg
2.4	cargo density	kg/m <sup>3</sup>
2.5	density (mass density)	kg/m <sup>3</sup>
2.6	fuel capacity (gravimetric)	kg
2.7	gas density	kg/m <sup>3</sup>
2.8	gross mass or payload	kg t
2.9	hoisting provisions	kg
2.10	linear density	kg/m
2.11	liquid density	kg/m <sup>3</sup>
2.12	mass	kg
2.13	moment of inertia	kg · m <sup>2</sup>
2.14	moment of momentum	kg · m <sup>2</sup> /s
2.15	momentum	kg · m/s

**3. Force-related**

3.1	air pressure (general)	kPa
3.2	altimeter setting	hPa
3.3	atmospheric pressure	hPa
3.4	bending moment	kN · m
3.5	force	N
3.6	fuel supply pressure	kPa
3.7	hydraulic pressure	kPa
3.8	modulus of elasticity	MPa
3.9	pressure	kPa
3.10	stress	MPa
3.11	surface tension	mN/m
3.12	thrust	kN
3.13	torque	N · m
3.14	vacuum	Pa

**4. Mechanics**

4.1	airspeed <sup>d)</sup>	km/h	kt
4.2	angular acceleration	rad/s <sup>2</sup>	
4.3	angular velocity	rad/s	
4.4	energy or work	J	
4.5	equivalent shaft power	kW	
4.6	frequency	Hz	
4.7	ground speed	km/h	kt
4.8	impact	J/m <sup>2</sup>	
4.9	kinetic energy absorbed by brakes	MJ	
4.10	linear acceleration	m/s <sup>2</sup>	
4.11	power	kW	
4.12	rate of trim	°/s	
4.13	shaft power	kW	
4.14	velocity	m/s	
4.15	vertical speed	m/s	ft/min
4.16	wind speed <sup>e)</sup>	m/s	kt



**5. Flow**

5.1	engine airflow	kg/s
5.2	engine waterflow	kg/h
5.3	fuel consumption (specific)	
	piston engines	kg/(kW · h)
	turbo-shaft engines	kg/(kW · h)
	jet engines	kg/(kN · h)
5.4	fuel flow	kg/h
5.5	fuel tank filling rate (gravimetric)	kg/min
5.6	gas flow	kg/s
5.7	liquid flow (gravimetric)	g/s
5.8	liquid flow (volumetric)	L/s
5.9	mass flow	kg/s
5.10	oil consumption	
	gas turbine	kg/h
	piston engines (specific)	g/(kW · h)
5.11	oil flow	g/s
5.12	pump capacity	L/min
5.13	ventilation airflow	m <sup>3</sup> /min
5.14	viscosity (dynamic)	Pa · s
5.15	viscosity (kinematic)	m <sup>2</sup> /s

**6. Thermodynamics**

6.1	coefficient of heat transfer	W/(m <sup>2</sup> · K)
6.2	heat flow per unit area	J/m <sup>2</sup>
6.3	heat flow rate	W
6.4	humidity (absolute)	g/kg
6.5	coefficient of linear expansion	°C <sup>-1</sup>
6.6	quantity of heat	J
6.7	temperature	°C

**7. Electricity and magnetism**

7.1	capacitance	F
7.2	conductance	S
7.3	conductivity	S/m
7.4	current density	A/m <sup>2</sup>
7.5	electric current	A
7.6	electric field strength	C/m <sup>2</sup>
7.7	electric potential	V
7.8	electromotive force	V
7.9	magnetic field strength	A/m
7.10	magnetic flux	Wb
7.11	magnetic flux density	T
7.12	power	W
7.13	quantity of electricity	C
7.14	resistance	Ω



**8. Light and related electromagnetic radiations**

8.1	illuminance	lx
8.2	luminance	cd/m <sup>2</sup>
8.3	luminous exitance	lm/m <sup>2</sup>
8.4	luminous flux	lm
8.5	luminous intensity	cd
8.6	quantity of light	lm · s
8.7	radiant energy	J
8.8	wavelength	m

**9. Acoustics**

9.1	frequency	Hz
9.2	mass density	kg/m <sup>3</sup>
9.3	noise level	dB <sup>e9</sup>
9.4	period, periodic time	s
9.5	sound intensity	W/m <sup>2</sup>
9.6	sound power	W
9.7	sound pressure	Pa
9.8	sound level	dB <sup>9</sup>
9.9	static pressure (instantaneous)	Pa
9.10	velocity of sound	m/s
9.11	volume velocity (instantaneous)	m <sup>3</sup> /s
9.12	wavelength	m

**10. Nuclear physics and ionizing radiation**

10.1	absorbed dose	Gy
10.2	absorbed dose rate	Gy/s
10.3	activity of radionuclides	Bq
10.4	dose equivalent	Sv
10.5	radiation exposure	C/kg
10.6	exposure rate	C/kg · s

- a) As used in navigation, generally in excess of 4 000 m.
- b) Such as aircraft fuel, hydraulic fluids, water, oil and high pressure oxygen vessels.
- c) Visibility of less than 5 km may be given in m.
- d) Airspeed is sometimes reported in flight operations in terms of the ratio MACH number.
- e) A conversion of 1 kt = 0.5 m/s is used in the NAM-CARs for the representation of wind speed.
- f) The decibel (dB) is a ratio which may be used as a unit for expressing sound pressure level and sound power level. When used, the reference level must be specified.

**2.02.5 Termination of use of Non-SI alternative units**

*Compliance Note. The non-SI units listed in Table 3 have been retained temporarily for use as alternative units because of their widespread use and to avoid potential safety problems which could result from the lack of international coordination concerning the termination of their use. As termination dates are established by the Council of ICAO, they will be reflected as Standards*

*contained in this Section. It is expected that the establishment of such dates will be well in advance of actual termination. Any special procedures associated with specific unit termination will be circulated once available by ICAO.*

- (1) The use in international civil aviation operations of the alternative non-SI units listed in Table 3 shall be terminated on the dates listed in Table 5 below.

**Table 5. Termination dates for non-SI alternative units**

<i>Non-SI alternative unit</i>	<i>Termination date</i>
Knot Nautical mile	Not established <sup>a</sup>
	Not established <sup>b</sup>

- a. No termination date has yet been established for use of nautical mile and knot  
b. No termination date has yet been established for use of the foot

**ATTACHMENT A  
DEVELOPMENT OF THE INTERNATIONAL SYSTEM OF UNITS (SI)**

(Reserved)



**ATTACHMENT B  
GUIDANCE ON THE APPLICATION OF THE SI**

**1. Introduction**

- 1.1 The International System of Units is a complete, coherent system which includes three classes of units:
  - a) base units;
  - b) supplementary units; and
  - c) derived units

- 1.2 The SI is based on seven units which are dimensionally independent and are listed in Table A1.

**Table B-1. SI base units**

<i>Quantity</i>	<i>Unit</i>	<i>Symbol</i>
amount of a substance	mole	mol
electric current	ampere	A
length	metre	m
luminous intensity	candela	cd
mass	kilogram	kg
thermodynamic temperature	kelvin	K
time	second	s

- 1.3 The supplementary units of the SI are listed in Table A2 and may be regarded either as base units or as derived units.

**Table B-2. SI supplementary units**

Quantity	Unit	Symbol
plane angle	radian	rad
solid angle	steradian	sr

1.4 Derived units of the SI are formed by combining base units, supplementary units and other derived units according to the algebraic relations linking the corresponding quantities. The symbols for derived units are obtained by means of the mathematical signs for multiplication, division and the use of exponents. Those derived SI units which have special names and symbols are listed in Table A3.

**Table B-3. SI derived units with special names**

<i>Quantity</i>	<i>Unit</i>	<i>Symbol</i>	<i>Derivation</i>
absorbed dose (radiation)	gray	Gy	J/kg
activity of radionuclides	Becquerel	Bq	1/s
capacitance	farad	F	C/V
conductance	siemens	S	A/V
dose equivalent (radiation)	Sievert	Sv	J/kg
electric potential, potential difference, electromotive force	volt	V	W/A
electric resistance	ohm	$\Omega$	V/A
energy, work, quantity of heat	joule	J	N · m
force	newton	N	kg · m/s <sup>2</sup>
frequency (of a periodic phenomenon)	hertz	Hz	1/s
illuminance	lux	lx	lm/m <sup>2</sup>
inductance	henry	H	Wb/A
luminous flux	lumen	lm	cd · sr



magnetic flux	weber	Wb	$V \cdot s$
magnetic flux density	tesla	T	$Wb/m^2$
power, radiant flux	watt	W	J/s
pressure, stress	pascal	Pa	$N/m^2$
quantity of electricity, electric charge	coulomb	C	$A \cdot s$

1.5 The SI is a rationalized selection of units from the metric system which individually are not new. The great advantage of SI is that there is only one unit for each physical quantity — the metre for length, kilogram (instead of gram) for mass, second for time, etc. From these elemental or base units, units for all other mechanical quantities are derived. These derived units are defined by simple relationships such as velocity equals rate of change of distance, acceleration equals rate of change of velocity, force is the product of mass and acceleration, work or energy is the product of force and distance, power is work done per unit time, etc. Some of these units have only generic names such as metre per second for velocity; others have special names such as newton (N) for force, joule (J) for work or energy, watt (W) for power. The SI units for force, energy and power are the same regardless of whether the process is mechanical, electrical, chemical or nuclear. A force of 1 newton applied for a distance of 1 metre can produce 1 joule of heat, which is identical with what 1 watt of electric power can produce in 1 second.

1.6 Corresponding to the advantages of SI, which result from the use of a unique unit for each physical quantity, are the advantages which result from the use of a unique and well-defined set of symbols and abbreviations. Such symbols and abbreviations eliminate the confusion that can arise from current practices in different disciplines such as the use of “b” for both the bar (a unit of pressure) and barn (a unit of area).

1.7 Another advantage of SI is its retention of the decimal relation between multiples and sub-multiples of the base units for each physical quantity. Prefixes are established for designating multiple and sub-multiple units from “exa” (10<sup>18</sup>) down to “atto” (10<sup>-18</sup>) for convenience in writing and speaking.

1.8




**Namibia Civil Aviation Authority -  
Safety Division**

**TECHNICAL STANDARDS  
(NAMCATS)  
  
Part 2: UOM**

1.9 Another major advantage of SI is its coherence. Units might be chosen arbitrarily, but making an independent choice of a unit for each category of mutually comparable quantities would lead in general to the appearance of several additional numerical factors in the equations between the numerical values. It is possible, however, and in practice more convenient, to choose a system of units in such a way that the equations between numerical values, including the numerical factors, have exactly the same form as the corresponding equations between the quantities. A unit system defined in this way is called coherent with respect to the system of quantities and equations in question. Equations between units of a coherent unit system contain as numerical factors only the number 1. In a coherent system the product or quotient of any two unit quantities is the unit of the resulting quantity. For example, in any coherent system, unit area results when unit length is multiplied by unit length, unit velocity when unit length is divided by unit time, and unit force when unit mass is multiplied by unit acceleration.

*Compliance Note. Figure B-1 illustrates the relationship of the units of the SI.*

Figure B-1

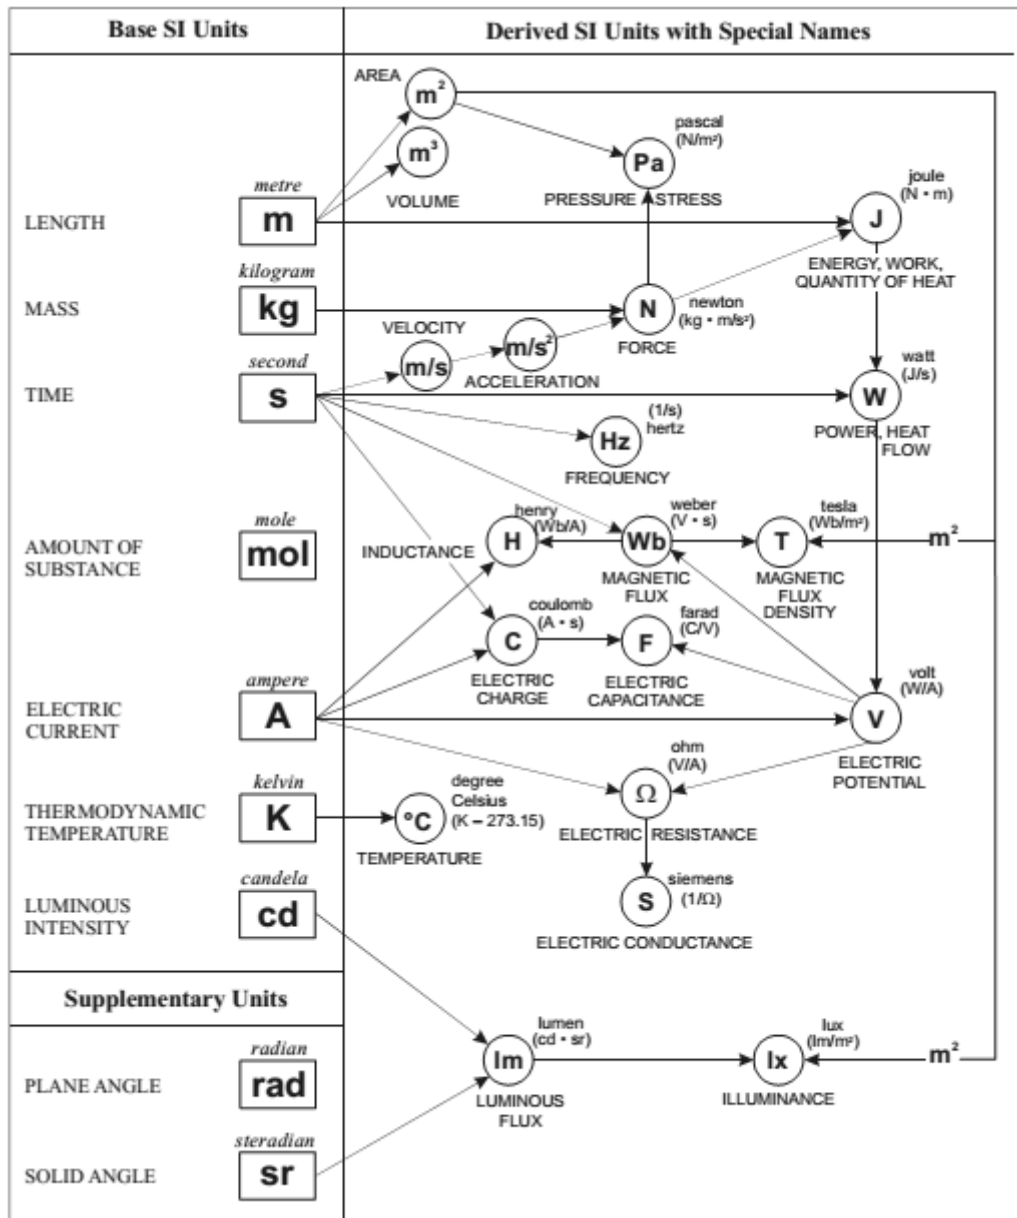

## 1.10 Mass, Force and Weight

- 1.10.1 The principal departure of SI from the gravimetric system of metric engineering units is the use of explicitly distinct units from mass and force. In SI, the name kilogram is restricted to the unit of mass, and the kilogram-force (from which the suffix force was in practice often erroneously dropped) is not to be used. In its place the SI unit of force, the newton, is



used. Likewise, the newton rather than the kilogram-force is used to form derived units which include force, for example, pressure or stress ( $\text{N/m}^2 = \text{Pa}$ ), energy ( $\text{N} \cdot \text{m} = \text{J}$ ), and power ( $\text{N} \cdot \text{m/s} = \text{W}$ ).

- 1.10.2 Considerable confusion exists in the use of the term weight as a quantity to mean either force or mass. In common use, the term weight nearly always means mass; thus, when one speaks of a person’s weight, the quantity referred to is mass. In science and technology, the term weight of a body has usually meant the force that, if applied to the body, would give it acceleration equal to the local acceleration of free fall. The adjective “local” in the phrase “local acceleration of free fall” has usually meant a location on the surface of the earth; in this context the “local acceleration of free fall” has the symbol  $g$  (sometimes referred to as “acceleration of gravity”) with observed values of  $g$  differing by over 0.5 per cent at various points on the earth’s surface and decreasing as distance from the earth is increased. Thus, because weight is a force = mass  $\times$  acceleration due to gravity, a person’s weight is conditional on the person’s location, but mass is not. A person with a mass of 70 kg might experience a force (weight) on earth of 686 newtons ( $\approx 155$  lbf) and a force (weight) of only 113 newtons ( $\approx 22$  lbf) on the moon. Because of the dual use of the term weight as a quantity, the term weight should be avoided in technical practice except under circumstances in which its meaning is completely clear. When the term is used, it is important to know whether mass or force is intended and to use SI units properly by using kilograms for mass or newtons for force.
- 1.10.3 Gravity is involved in determining mass with a balance or scale. When a standard mass is used to balance the measured mass, the direct effect of gravity on the two masses is cancelled, but the indirect effect through the buoyancy of air or other fluid is generally not cancelled. In using a spring scale, mass is measured indirectly, since the instrument responds to the force of gravity. Such scales may be calibrated in mass units if the variation in acceleration of gravity and buoyancy corrections are not significant in their use.



## 1.11 Energy and Torque

1.11.1 The vector product of force and moment arm is widely designated by the unit newton metre. This unit for bending moment or torque results in confusion with the unit for energy, which is also newton metre. If torque is expressed as newton metre per radian, the relationship to energy is clarified, since the product of torque and angular rotation is energy:

$$(N \cdot m/\text{rad}) \cdot \text{rad} = N \cdot m$$

1.11.2 If vectors were shown, the distinction between energy and torque would be obvious, since the orientation of force and length is different in the two cases. It is important to recognize this difference in using torque and energy, and the joule should never be used for torque.

## 2. SI PREFIXES

### 2.1 Selection of prefixes

2.1.1 In general the SI prefixes shall be used to indicate orders of magnitude, thus eliminating non-significant digits and leading zeros in decimal fractions and providing a convenient alternative to the powers-of-ten notation preferred in computation. For example:

12 300 mm becomes 12.3 m

$12.3 \times 10^3$  m becomes 12.3 km

0.001 23  $\mu\text{A}$  becomes 1.23 nA

2.1.2 When expressing a quantity by a numerical value and a unit, prefixes shall be chosen so that the numerical value lies between 0.1 and 1 000. To minimize variety, prefixes representing powers of 1 000 shall be used. However, in the following cases, deviation from the above may be indicated:

- a) in expressing area and volume, the prefixes hecto, deca, deci and centi may be required: for example, square hectometre, cubic centimetre;



- b) in tables of values of the same quantity, or in a discussion of such values within a given context, it is generally preferable to use the same unit multiple throughout; and
- c) for certain quantities in particular applications, one particular multiple is customarily used. For example, the hectopascal is used for altimeter settings and the millimetre is used for linear dimensions in mechanical engineering drawings even when the values lie outside the range 0.1 to 1 000.

### 2.2 Prefixes in compound units

Only one prefix shall be used in forming a multiple of a compound unit. The prefix shall be attached to a unit in the numerator. One exception to this may occur when the kilogram is one of the units.

For example:

V/m, not mV/mm; MJ/kg, not kJ/g

### 2.3 Compound prefixes

Compound prefixes, formed by the juxtaposition of two or more SI prefixes, are not to be used.

For example:

1 nm not 1m $\mu$ m; 1 pF not 1 $\mu$  $\mu$ F

If values are required outside the range covered by the prefixes, they shall be expressed using powers of ten applied to the base unit.

### 2.4 Power Units



An exponent attached to a symbol containing a prefix indicates that the multiple or sub-multiple of the unit (the unit with its prefix) is raised to the power expressed by the exponent.

For example:

$$1 \text{ cm}^3 = (10^{-2} \text{ m})^3 = 10^{-6} \text{ m}^3$$

$$1 \text{ ns}^{-1} = (10^{-9} \text{ s})^{-1} = 10^9 \text{ s}^{-1}$$

$$1 \text{ mm}^2/\text{s} = (10^{-3} \text{ m})^2/\text{s} = 10^{-6} \text{ m}^2/\text{s}$$

### 3. Style and Usage

#### 3.1 Rules for writing unit symbols

- 3.1.1 Unit symbols should be printed in Roman (upright) type regardless of the type style used in the surrounding text.
- 3.1.2 Unit symbols are unaltered in the plural.
- 3.1.3 Unit symbols are not followed by a period except when used at the end of a sentence.
- 3.1.4 Letter unit symbols are written in lower case (cd) unless the unit name has been derived from a proper name, in which case the first letter of the symbol is capitalized (W, Pa). Prefix and unit symbols retain their prescribed form regardless of the surrounding typography.
- 3.1.5 In the complete expression for a quantity, a space should be left between the numerical value and the unit symbol. For example, write 35 mm not 35mm, and 2.37 lm, not 2.37lm. When the quantity is used in an adjectival sense, a hyphen is often used, for example, 35-mm film.

*Exception:* No space is left between the numerical value and the symbols for degree, minute and second of plane angle, and degree Celsius



3.1.6 No space is used between the prefix and unit symbols.

3.1.7 Symbols, not abbreviations, should be used for units. For example, use “A”, not “amp”, for ampere.

**3.2 Rules for writing unit names**

3.2.1 Spelled-out unit names are treated as common nouns in English. Thus, the first letter of a unit name is not capitalized except at the beginning of a sentence or in capitalized material such as a title, even though the unit name may be derived from a proper name and therefore be represented as a symbol by a capital letter.

For example, normally write “newton” not “Newton” even though the symbol is N.

3.2.2 Plurals are used when required by the rules of grammar and are normally formed regularly, for example, henries for the plural of henry.

The following irregular plurals may be used:

Singular	Plural
lux	lux
hertz	hertz
siemens	siemens

3.2.3 No space or hyphen is used between the prefix and the unit name.

**3.3 Units formed by multiplication and division**

3.3.1 *With unit names:*

Product, use a space (preferred) or hyphen:  
newton metre or newton-metre.



In the case of the watt hour the space may be omitted, thus:

watthour.

Quotient, use the word per and not a solidus:

metre per second not metre/second.

Powers, use the modifier squared or cubed placed after the unit name:

metre per second squared.

In the case of area or volume, a modifier may be placed before the unit name:

square millimetre, cubic metre.

This exception also applies to derived units using area or volume:

watt per square metre.

Note.— To avoid ambiguity in complicated expressions, symbols are preferred to words

3.3.2 *With unit symbols*

Product may be indicated in either of the following ways:

Nm or N · m for newton metre.

*Note.— When using for a prefix a symbol which coincides with the symbol for the unit, special care should be taken to avoid confusion. The unit newton metre for torque should be written, for example, Nm or N · m to avoid confusion with mN, the millinewton.*

An exception to this practice is made for computer printouts, automatic typewriter work, etc., where the dot half high is not possible, and a dot on the line may be used.

Quotient, use one of the following forms:

1 m m/s m s . s or or —

In no case should more than one solidus be used in the same expression unless parentheses are inserted to avoid ambiguity. For example, write:



$J/(\text{mol} \cdot \text{K})$  or  $J \cdot \text{mol}^{-1} \cdot \text{K}^{-1}$  or  $(J/\text{mol})/\text{K}$   
but not  $J/\text{mol}/\text{K}$ .

3.3.3 Symbols and unit names should not be mixed in the same expression. Write:

joules per kilogram or  $J/\text{kg}$  or  $J \cdot \text{kg}^{-1}$   
but not joules/kilogram or joules/kg or joules  $\cdot \text{kg}^{-1}$ .

### 3.4 Numbers

3.4.1 The preferred decimal marker is a point on the line (period); however, the comma is also acceptable. When writing numbers less than one, a zero should be written before the decimal marker.

3.4.2 The comma is not to be used to separate digits. Instead, digits should be separated into groups of three, counting from the decimal point towards the left and the right, and using a small space to separate the groups. For example:

73 655    7 281    2.567 321    0.133 47

The space between groups should be approximately the width of the letter “i” and the width of the space should be constant even if variable-width spacing is used between the words

3.4.3 The sign for multiplication of numbers is a cross ( $\times$ ) or a dot half high. However, if the dot half high is used as the multiplication sign, a point on the line must not be used as a decimal marker in the same expression.

3.4.4 Attachment of letters to a unit symbol as a means of giving information about the nature of the quantity under consideration is incorrect. Thus MWe for “megawatts electrical (power)”, Vac for “volts ac” and kJt for “kilojoules thermal (energy)” are not acceptable.



**Namibia Civil Aviation Authority -  
Safety Division**

**TECHNICAL STANDARDS  
(NAMCATS)**

**Part 2: UOM**

For this reason, no attempt should be made to construct SI equivalents of the abbreviations “psia” and “psig”, so often used to distinguish between absolute and gauge pressure. If the context leaves any doubt as to which is meant, the word pressure must be qualified appropriately.

For example:

“... at a gauge pressure of 13 kPa”.

or

“... at an absolute pressure of 13 kPa”.



## ATTACHMENT C CONVERSION FACTORS

### 1.1 General

- 1.1.1 The list of conversion factors which is contained in these Standards is provided to express the definitions of miscellaneous units of measure as numerical multiples of SI units.
- 1.1.2 The conversion factors are presented for ready adaptation to computer readout and electronic data transmission. The factors are written as a number greater than 1 and less than 10 with six or less decimal places. This number is followed by the letter E (for exponent), a plus or minus symbol, and two digits which indicate the power of 10 by which the number must be multiplied to obtain the correct value.

For example:

$$3.523\ 907\ E - 02\ \text{is}\ 3.523\ 907 \times 10^{-2}\ \text{or}\ 0.035\ 239\ 07$$

Similarly,

$$3.386\ 389\ E + 03\ \text{is}\ 3.386\ 389 \times 10^3\ \text{or}\ 3\ 386.389$$

- 1.1.3 An asterisk (\*) after the sixth decimal place indicates that the conversion factor is exact and that all subsequent digits are zero. Where less than six decimal places are shown, more precision is not warranted.

- 1.1.4 Further examples of use of the tables:

To convert from to Multiply by pound-force per square foot Pa 4.788 026 E + 01 inch m  
2.540 000\*E - 02

thus:

$$1\ \text{lbf/ft}^2 = 47.880\ 26\ \text{Pa}$$



1 inch = 0.025 4 m (exactly)

**1.2 Factors not listed**

1.2.1 Conversion factors for compound units which are not listed herein can easily be developed from numbers given in the list by the substitution of converted units, as follows.

Example: To find conversion factor of lb · ft/s to kg · m/s:

first convert 1 lb to 0.453 592 4 kg 1 ft to 0.304 8 m

then substitute: (0.453 592 4 kg) × (0.304 8 m)/s = 0.138 255 kg · m/s

Thus the factor is 1.382 55 E – 01.

**Table C-1. Conversion Factors to SI Units**

*(Symbols of SI units given in parentheses)*

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
abampere	ampere (A)	1.000 000 *E + 01
abcoulomb	coulomb (C)	1.000 000 *E + 01
abfarad	farad (F)	1.000 000 *E + 09
abhenry	henry (H)	1.000 000 *E – 09
abmho	siemens (S)	1.000 000 *E + 09
abohm	ohm (Ω)	1.000 000 *E – 09
abvolt	volt (V)	1.000 000 *E – 08
acre (U.S. survey)	square metre (m <sup>2</sup> )	4.046 873 E + 03
ampere hour	coulomb (C)	3.600 000 *E + 03
are	square metre (m <sup>2</sup> )	1.000 000 *E + 02
atmosphere (standard)	pascal (Pa)	1.013 250 *E + 05
atmosphere (technical = 1 kgf/cm <sup>2</sup> )	pascal (Pa)	9.806 650 *E + 04



**Namibia Civil Aviation Authority -  
Safety Division**

**TECHNICAL STANDARDS  
(NAMCATS)**

**Part 2: UOM**

bar	pascal (Pa)	1.000 000 *E + 05
barrel (for petroleum, 42 U.S. liquid gal)	cubic metre (m <sup>3</sup> )	1.589 873 *E - 01
British thermal unit (International Table)	joule (J)	1.055 056 E + 03
British thermal unit (mean)	joule (J)	1.055 87 E + 03
British thermal unit (thermochemical)	joule (J)	1.054 350 E + 03
British thermal unit (39°F)	joule (J)	1.059 67 E + 03
British thermal unit (59°F)	joule (J)	1.054 80 E + 03
British thermal unit (60°F)	joule (J)	1.054 68 E + 03
Btu (International Table) · ft/h · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	1.730 735 E + 00
Btu (thermochemical) · ft/h · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	1.729 577 E + 00
Btu (International Table) · in/h · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	1.442 279 E - 01
Btu (thermochemical) · in/h · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	1.441 314 E - 01
Btu (International Table) · in/s · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	5.192 204 E + 02
Btu (thermochemical) · in/s · ft <sup>2</sup> · °F (k, thermal conductivity)	watt per metre kelvin (W/m · K)	5.188 732 E + 02
Btu (International Table)/h	watt (W)	2.930 711 E - 01
Btu (thermochemical)/h	watt (W)	2.928 751 E - 01
Btu (thermochemical)/min	watt (W)	1.757 250 E + 01
Btu (thermochemical)/s	watt (W)	1.054 350 E + 03
Btu (International Table)/ft <sup>2</sup>	joule per square metre (J/m <sup>2</sup> )	1.135 653 E + 04
Btu (thermochemical)/ft <sup>2</sup>	joule per square metre (J/m <sup>2</sup> )	1.134 893 E + 04
Btu (thermochemical)/ft <sup>2</sup> · h	watt per square metre (W/m <sup>2</sup> )	3.152 481 E + 00
Btu (thermochemical)/ft <sup>2</sup> · min	watt per square metre (W/m <sup>2</sup> )	1.891 489 E + 02
Btu (thermochemical)/ft <sup>2</sup> · s	watt per square metre (W/m <sup>2</sup> )	1.134 893 E + 04
Btu (thermochemical)/in <sup>2</sup> · s	watt per square metre (W/m <sup>2</sup> )	1.634 246 E + 06

\* An asterisk (\*) after the sixth decimal place indicates that the conversion factor is exact and that all subsequent digits are zero. Where less than six decimal places are shown, more precision is not warranted.

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
Btu (International Table)/h · ft <sup>2</sup> · °F (C, thermal conductance)	watt per square metre kelvin (W/m <sup>2</sup> · K)	5.678 263 E + 00
Btu (thermochemical)/h · ft <sup>2</sup> · °F (C, thermal conductance)	watt per square metre kelvin (W/m <sup>2</sup> · K)	5.674 466 E + 00
Btu (International Table)/s · ft <sup>2</sup> · °F	watt per square metre kelvin (W/m <sup>2</sup> · K)	2.044 175 E + 04
Btu (thermochemical)/s · ft <sup>2</sup> · °F	watt per square metre kelvin (W/m <sup>2</sup> · K)	2.042 808 E + 04
Btu (International Table)/lb	joule per kilogram (J/kg)	2.326 000 *E + 03
Btu (thermochemical)/lb	joule per kilogram (J/kg)	2.324 444 E + 03
Btu (International Table)/lb · °F (c, heat capacity)	joule per kilogram kelvin (J/kg · K)	4.186 800 *E + 03
Btu (thermochemical)/lb · °F (c, heat capacity)	joule per kilogram kelvin (J/kg · K)	4.184 000 E + 03



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)

Part 2: UOM

calibre (inch)	metre (m)	2.540 000 *E - 02
calorie (International Table)	joule (J)	4.186 800 *E + 00
calorie (mean)	joule (J)	4.190 02 E + 00
calorie (thermochemical)	joule (J)	4.184 000 *E + 00
calorie (15°C)	joule (J)	4.185 80 E + 00
calorie (20°C)	joule (J)	4.181 90 E + 00
calorie (kilogram, International Table)	joule (J)	4.186 800 *E + 03
calorie (kilogram, mean)	joule (J)	4.190 02 E + 03
calorie (kilogram, thermochemical)	joule (J)	4.184 000 *E + 03
cal (thermochemical)/cm <sup>2</sup>	joule per square metre (J/m <sup>2</sup> )	4.184 000 *E + 04
cal (International Table)/g	joule per kilogram (J/kg)	4.186 800 *E + 03
cal (thermochemical)/g	joule per kilogram (J/kg)	4.184 000 *E + 03
cal (International Table)/g · °C	joule per kilogram kelvin (J/kg · K)	4.186 800 *E + 03
cal (thermochemical)/g · °C	joule per kilogram kelvin (J/kg · K)	4.184 000 *E + 03
cal (thermochemical)/min	watt (W)	6.973 333 E - 02
cal (thermochemical)/s	watt (W)	4.184 000 *E + 00
cal (thermochemical)/cm <sup>2</sup> · min	watt per square metre (W/m <sup>2</sup> )	6.973 333 E + 02
cal (thermochemical)/cm <sup>2</sup> · s	watt per square metre (W/m <sup>2</sup> )	4.184 000 *E + 04
cal (thermochemical)/cm · s · °C	watt per metre kelvin (W/m · K)	4.184 000 *E + 02
centimetre of mercury (0°C)	pascal (Pa)	1.333 22 E + 03
centimetre of water (4°C)	pascal (Pa)	9.806 38 E + 01
centipoise	pascal second (Pa · s)	1.000 000 *E - 03
centistokes	metre squared per second (m <sup>2</sup> /s)	1.000 000 *E - 06
circular mil	square metre (m <sup>2</sup> )	5.067 075 E - 10
clo	kelvin metre squared per watt (K · m <sup>2</sup> /W)	2.003 712 E - 01
cup	cubic metre (m <sup>3</sup> )	2.365 882 E - 04
curie	becquerel (Bq)	3.700 000 *E + 10
day (mean solar)	second (s)	8.640 000 E + 04
day (sidereal)	second (s)	8.616 409 E + 04
degree (angle)	radian (rad)	1.745 329 E - 02
°F · h · ft <sup>2</sup> /Btu (International Table) (R, thermal resistance)	kelvin metre squared per watt (K · m <sup>2</sup> /W)	1.761 102 E - 01
°F · h · ft <sup>2</sup> /Btu (thermochemical) (R, thermal resistance)	kelvin metre squared per watt (K · m <sup>2</sup> /W)	1.762 280 E - 01
dyne	newton (N)	1.000 000 *E - 05
dyne · cm	newton metre (N · m)	1.000 000 *E - 07
dyne/cm <sup>2</sup>	pascal (Pa)	1.000 000 *E - 01

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
electronvolt	joule (J)	1.602 19 E - 19
EMU of capacitance	farad (F)	1.000 000 *E + 09
EMU of current	ampere (A)	1.000 000 *E + 01
EMU of electric potential	volt (V)	1.000 000 *E - 08
EMU of inductance	henry (H)	1.000 000 *E - 09
EMU of resistance	ohm (Ω)	1.000 000 *E - 09
erg	joule (J)	1.000 000 *E - 07
erg/cm <sup>2</sup> · s	watt per square metre (W/m <sup>2</sup> )	1.000 000 *E - 03
erg/s	watt (W)	1.000 000 *E - 07
ESU of capacitance	farad (F)	1.112 650 E - 12
ESU of current	ampere (A)	3.335 6 E - 10
ESU of electric potential	volt (V)	2.997 9 E + 02
ESU of inductance	henry (H)	8.987 554 E + 11
ESU of resistance	ohm (Ω)	8.987 554 E + 11



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)

Part 2: UOM

faraday (based on carbon-12)	coulomb (C)	9.648 70	E + 04
faraday (chemical)	coulomb (C)	9.649 57	E + 04
faraday (physical)	coulomb (C)	9.652 19	E + 04
fathom	metre (m)	1.828 8	E + 00
fermi (femtometre)	metre (m)	1.000 000	*E - 15
fluid ounce (U.S.)	cubic metre (m <sup>3</sup> )	2.957 353	E - 05
foot	metre (m)	3.048 000	*E - 01
foot (U.S. survey)	metre (m)	3.048 006	E - 01
foot of water (39.2°F)	pascal (Pa)	2.988 98	E + 03
ft <sup>2</sup>	square metre (m <sup>2</sup> )	9.290 304	*E - 02
ft <sup>2</sup> /h (thermal diffusivity)	metre squared per second (m <sup>2</sup> /s)	2.580 640	*E - 05
ft <sup>2</sup> /s	metre squared per second (m <sup>2</sup> /s)	9.290 304	*E - 02
ft <sup>3</sup> (volume; section modulus)	cubic metre (m <sup>3</sup> )	2.831 685	E - 02
ft <sup>3</sup> /min	cubic metre per second (m <sup>3</sup> /s)	4.719 474	E - 04
ft <sup>3</sup> /s	cubic metre per second (m <sup>3</sup> /s)	2.831 685	E - 02
ft <sup>4</sup> (moment of section)	metre to the fourth power (m <sup>4</sup> )	8.630 975	E - 03
ft · lbf	joule (J)	1.355 818	E + 00
ft · lbf/h	watt (W)	3.766 161	E - 04
ft · lbf/min	watt (W)	2.259 697	E - 02
ft · lbf/s	watt (W)	1.355 818	E + 00
ft · poundal	joule (J)	4.214 011	E - 02
free fall, standard (g)	metre per second squared (m/s <sup>2</sup> )	9.806 650	*E + 00
ft/h	metre per second (m/s)	8.466 667	E - 05
ft/min	metre per second (m/s)	5.080 000	*E - 03
ft/s	metre per second (m/s)	3.048 000	*E - 01
ft/s <sup>2</sup>	metre per second squared (m/s <sup>2</sup> )	3.048 000	*E - 01
footcandle	lux (lx)	1.076 391	E + 01
footlambert	candela per square metre (cd/m <sup>2</sup> )	3.426 259	E + 00
gal	metre per second squared (m/s <sup>2</sup> )	1.000 000	*E - 02
gallon (Canadian liquid)	cubic metre (m <sup>3</sup> )	4.546 090	E - 03
gallon (U.K. liquid)	cubic metre (m <sup>3</sup> )	4.546 092	E - 03
gallon (U.S. dry)	cubic metre (m <sup>3</sup> )	4.404 884	E - 03
gallon (U.S. liquid)	cubic metre (m <sup>3</sup> )	3.785 412	E - 03
gal (U.S. liquid)/day	cubic metre per second (m <sup>3</sup> /s)	4.381 264	E - 08



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)

Part 2: UOM

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
gal (U.S. liquid)/min	cubic metre per second (m <sup>3</sup> /s)	6.309 020 E – 05
gal (U.S. liquid)/hp · h (SFC, specific fuel consumption)	cubic metre per joule (m <sup>3</sup> /J)	1.410 089 E – 09
gamma	tesla (T)	1.000 000 *E – 09
gauss	tesla (T)	1.000 000 *E – 04
gilbert	ampere (A)	7.957 747 E – 01
grad	degree (angular)	9.000 000 *E – 01
grad	radian (rad)	1.570 796 E – 02
gram	kilogram (kg)	1.000 000 *E – 03
g/cm <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	1.000 000 *E + 03
gram-force/cm <sup>2</sup>	pascal (Pa)	9.806 650 *E + 01
hectare	square metre (m <sup>2</sup> )	1.000 000 *E + 04
horsepower (550 ft · lbf/s)	watt (W)	7.456 999 E + 02
horsepower (electric)	watt (W)	7.460 000 *E + 02
horsepower (metric)	watt (W)	7.354 99 E + 02
horsepower (water)	watt (W)	7.460 43 E + 02
horsepower (U.K.)	watt (W)	7.457 0 E + 02
hour (mean solar)	second (s)	3.600 000 E + 03
hour (sidereal)	second (s)	3.590 170 E + 03
hundredweight (long)	kilogram (kg)	5.080 235 E + 01
hundredweight (short)	kilogram (kg)	4.535 924 E + 01
inch	metre (m)	2.540 000 *E – 02
inch of mercury (32°F)	pascal (Pa)	3.386 38 E + 03
inch of mercury (60°F)	pascal (Pa)	3.376 85 E + 03
inch of water (39.2°F)	pascal (Pa)	2.490 82 E + 02
inch of water (60°F)	pascal (Pa)	2.488 4 E + 02
in <sup>2</sup>	square metre (m <sup>2</sup> )	6.451 600 *E – 04
in <sup>3</sup> (volume; section modulus)	cubic metre (m <sup>3</sup> )	1.638 706 E – 05
in <sup>3</sup> /min	cubic metre per second (m <sup>3</sup> /s)	2.731 177 E – 07
in <sup>4</sup> (moment of section)	metre to the fourth power (m <sup>4</sup> )	4.162 314 E – 07
in/s	metre per second (m/s)	2.540 000 *E – 02
in/s <sup>2</sup>	metre per second squared (m/s <sup>2</sup> )	2.540 000 *E – 02
kilocalorie (International Table)	joule (J)	4.186 800 *E + 03
kilocalorie (mean)	joule (J)	4.190 02 E + 03
kilocalorie (thermochemical)	joule (J)	4.184 000 *E + 03
kilocalorie (thermochemical)/min	watt (W)	6.973 333 E + 01
kilocalorie (thermochemical)/s	watt (W)	4.184 000 *E + 03
kilogram-force (kgf)	newton (N)	9.806 650 *E + 00
kgf · m	newton metre (N · m)	9.806 650 *E + 00
kgf · s <sup>2</sup> /m (mass)	kilogram (kg)	9.806 650 *E + 00
kgf/cm <sup>2</sup>	pascal (Pa)	9.806 650 *E + 04
kgf/m <sup>2</sup>	pascal (Pa)	9.806 650 *E + 00
kgf/mm <sup>2</sup>	pascal (Pa)	9.806 650 *E + 06
km/h	metre per second (m/s)	2.777 778 E – 01
kilopond	newton (N)	9.806 650 *E + 00
kW · h	joule (J)	3.600 000 *E + 06
kip (1 000 lbf)	newton (N)	4.448 222 E + 03



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)

Part 2: UOM

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
kip/in <sup>2</sup> (ksi)	pascal (Pa)	6.894 757 E + 06
knot (international)	metre per second (m/s)	5.144 444 E - 01
lambert	candela per square metre (cd/m <sup>2</sup> )	1/π *E + 04
lambert	candela per square metre (cd/m <sup>2</sup> )	3.183 099 E + 03
langley	joule per square metre (J/m <sup>2</sup> )	4.184 000 *E + 04
lb · ft <sup>2</sup> (moment of inertia)	kilogram metre squared (kg · m <sup>2</sup> )	4.214 011 E - 02
lb · in <sup>2</sup> (moment of inertia)	kilogram metre squared (kg · m <sup>2</sup> )	2.926 397 E - 04
lb/ft · h	pascal second (Pa · s)	4.133 789 E - 04
lb/ft · s	pascal second (Pa · s)	1.488 164 E + 00
lb/ft <sup>2</sup>	kilogram per square metre (kg/m <sup>2</sup> )	4.882 428 E + 00
lb/ft <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	1.601 846 E + 01
lb/gal (U.K. liquid)	kilogram per cubic metre (kg/m <sup>3</sup> )	9.977 633 E + 01
lb/gal (U.S. liquid)	kilogram per cubic metre (kg/m <sup>3</sup> )	1.198 264 E + 02
lb/h	kilogram per second (kg/s)	1.259 979 E - 04
lb/hp · h (SFC, specific fuel consumption)	kilogram per joule (kg/J)	1.689 659 E - 07
lb/in <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	2.767 990 E + 04
lb/min	kilogram per second (kg/s)	7.559 873 E - 03
lb/s	kilogram per second (kg/s)	4.535 924 E - 01
lb/yd <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	5.932 764 E - 01
lbf · ft	newton metre (N · m)	1.355 818 E + 00
lbf · ft/in	newton metre per metre (N · m/m)	5.337 866 E + 01
lbf · in	newton metre (N · m)	1.129 848 E - 01
lbf · in/in	newton metre per metre (N · m/m)	4.448 222 E + 00
lbf · s/ft <sup>2</sup>	pascal second (Pa · s)	4.788 026 E + 01
lbf/ft	newton per metre (N/m)	1.459 390 E + 01
lbf/ft <sup>2</sup>	pascal (Pa)	4.788 026 E + 01
lbf/in	newton per metre (N/m)	1.751 268 E + 02
lbf/in <sup>2</sup> (psi)	pascal (Pa)	6.894 757 E + 03
lbf/lb (thrust/weight (mass) ratio)	newton per kilogram (N/kg)	9.806 650 E + 00
light year	metre (m)	9.460 55 E + 15
litre	cubic metre (m <sup>3</sup> )	1.000 000 *E - 03
maxwell	weber (Wb)	1.000 000 *E - 08
mho	siemens (S)	1.000 000 *E + 00
microinch	metre (m)	2.540 000 *E - 08
micron	metre (m)	1.000 000 *E - 06
mil	metre (m)	2.540 000 *E - 05
mile (international)	metre (m)	1.609 344 *E + 03
mile (statute)	metre (m)	1.609 3 E + 03
mile (U.S. survey)	metre (m)	1.609 347 E + 03
mile (international nautical)	metre (m)	1.852 000 *E + 03
mile (U.K. nautical)	metre (m)	1.853 184 *E + 03
mile (U.S. nautical)	metre (m)	1.852 000 *E + 03
mi <sup>2</sup> (international)	square metre (m <sup>2</sup> )	2.589 988 E + 06
mi <sup>2</sup> (U.S. survey)	square metre (m <sup>2</sup> )	2.589 988 E + 06
mi/h (international)	metre per second (m/s)	4.470 400 *E - 01
mi/h (international)	kilometre per hour (km/h)	1.609 344 *E + 00
mi/min (international)	metre per second (m/s)	2.682 240 *E + 01



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)

Part 2: UOM

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
mi/s (international)	metre per second (m/s)	1.609 344 *E + 03
millibar	pascal (Pa)	1.000 000 *E + 02
millimetre of mercury (0°C)	pascal (Pa)	1.333 22 E + 02
minute (angle)	radian (rad)	2.908 882 E - 04
minute (mean solar)	second (s)	6.000 000 E + 01
minute (sidereal)	second (s)	5.983 617 E + 01
month (mean calendar)	second(s)	2.628 000 E + 06
oersted	ampere per metre (A/m)	7.957 747 E + 01
ohm centimetre	ohm metre ( $\Omega \cdot m$ )	1.000 000 *E - 02
ohm circular-mil per ft	ohm millimetre squared per metre ( $\Omega \cdot mm^2/m$ )	1.662 426 E - 03
ounce (avoirdupois)	kilogram (kg)	2.834 952 E - 02
ounce (troy or apothecary)	kilogram (kg)	3.110 348 E - 02
ounce (U.K. fluid)	cubic metre (m <sup>3</sup> )	2.841 307 E - 05
ounce (U.S. fluid)	cubic metre (m <sup>3</sup> )	2.957 353 E - 05
ounce-force	newton (N)	2.780 139 E - 01
ozf · in	newton metre (N · m)	7.061 552 E - 03
oz (avoirdupois)/gal (U.K. liquid)	kilogram per cubic metre (kg/m <sup>3</sup> )	6.236 021 E + 00
oz (avoirdupois)/gal (U.S. liquid)	kilogram per cubic metre (kg/m <sup>3</sup> )	7.489 152 E + 00
oz (avoirdupois)/in <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	1.729 994 E + 03
oz (avoirdupois)/ft <sup>2</sup>	kilogram per square metre (kg/m <sup>2</sup> )	3.051 517 E - 01
oz (avoirdupois)/yd <sup>2</sup>	kilogram per square metre (kg/m <sup>2</sup> )	3.390 575 E - 02
parsec	metre (m)	3.085 678 E + 16
pennyweight	kilogram (kg)	1.555 174 E - 03
perm (0°C)	kilogram per pascal second metre squared (kg/Pa · s · m <sup>2</sup> )	5.721 35 E - 11
perm (23°C)	kilogram per pascal second metre squared (kg/Pa · s · m <sup>2</sup> )	5.745 25 E - 11
perm · in (0°C)	kilogram per pascal second metre (kg/Pa · s · m)	1.453 22 E - 12
perm · in (23°C)	kilogram per pascal second metre (kg/Pa · s · m)	1.459 29 E - 12
phot	lumen per square metre (lm/m <sup>2</sup> )	1.000 000 *E + 04
pint (U.S. dry)	cubic metre (m <sup>3</sup> )	5.506 105 E - 04
pint (U.S. liquid)	cubic metre (m <sup>3</sup> )	4.731 765 E - 04
poise (absolute viscosity)	pascal second (Pa · s)	1.000 000 *E - 01
pound (lb avoirdupois)	kilogram (kg)	4.535 924 E - 01
pound (troy or apothecary)	kilogram (kg)	3.732 417 E - 01
poundal	newton (N)	1.382 550 E - 01
poundal/ft <sup>2</sup>	pascal (Pa)	1.488 164 E + 00
poundal · s/ft <sup>2</sup>	pascal second (Pa · s)	1.488 164 E + 00
pound-force (lbf)	newton (N)	4.448 222 E + 00
quart (U.S. dry)	cubic metre (m <sup>3</sup> )	1.101 221 E - 03
quart (U.S. liquid)	cubic metre (m <sup>3</sup> )	9.463 529 E - 04
rad (radiation dose absorbed)	gray (Gy)	1.000 000 *E - 02
rem	sievert (Sv)	1.000 000 *E - 02



Namibia Civil Aviation Authority -  
Safety Division

TECHNICAL STANDARDS  
(NAMCATS)


Part 2: UOM

<i>To convert from</i>	<i>to</i>	<i>Multiply by</i>
the	1 per pascal second (1/Pa · s)	1.000 000 *E + 01
montgen	coulomb per kilogram (C/kg)	2.58 E – 04
second (angle)	radian (rad)	4.848 137 E – 06
second (sidereal)	second (s)	9.972 696 E – 01
slug	kilogram (kg)	1.459 390 E + 01
slug/ft · s	pascal second (Pa · s)	4.788 026 E + 01
slug/ft <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	5.153 788 E + 02
statampere	ampere (A)	3.335 640 E – 10
statcoulomb	coulomb (C)	3.335 640 E – 10
statfarad	farad (F)	1.112 650 E – 12
stathenry	henry (H)	8.987 554 E + 11
statmho	siemens (S)	1.112 650 E – 12
statohm	ohm (Ω)	8.987 554 E + 11
statvolt	volt (V)	2.997 925 E + 02
stere	cubic metre (m <sup>3</sup> )	1.000 000 *E + 00
stilb	candela per square metre (cd/m <sup>2</sup> )	1.000 000 *E + 04
stokes (kinematic viscosity)	metre squared per second (m <sup>2</sup> /s)	1.000 000 *E – 04
therm	joule (J)	1.055 056 E + 08
ton (assay)	kilogram (kg)	2.916 667 E – 02
ton (long, 2 240 lb)	kilogram (kg)	1.016 047 E + 03
ton (metric)	kilogram (kg)	1.000 000 *E + 03
ton (nuclear equivalent of TNT)	joule (J)	4.184 E + 09
ton (refrigeration)	watt (W)	3.516 800 E + 03
ton (register)	cubic metre (m <sup>3</sup> )	2.831 685 E + 00
ton (short, 2 000 lb)	kilogram (kg)	9.071 847 E + 02
ton (long)/yd <sup>3</sup>	kilogram per cubic metre (kg/m <sup>3</sup> )	1.328 939 E + 03
ton (short)/h	kilogram per second (kg/s)	2.519 958 E – 01
ton-force (2 000 lbf)	newton (N)	8.896 444 E + 03
tonne	kilogram (kg)	1.000 000 *E + 03
torr (mm Hg, 0°C)	pascal (Pa)	1.333 22 E + 02
unit pole	weber (Wb)	1.256 637 E – 07
W · h	joule (J)	3.600 000 *E + 03
W · s	joule (J)	1.000 000 *E + 00
W/cm <sup>2</sup>	watt per square metre (W/m <sup>2</sup> )	1.000 000 *E + 04
W/in <sup>2</sup>	watt per square metre (W/m <sup>2</sup> )	1.550 003 E + 03
yard	metre (m)	9.144 000 *E – 01
yd <sup>2</sup>	square metre (m <sup>2</sup> )	8.361 274 E – 01
yd <sup>3</sup>	cubic metre (m <sup>3</sup> )	7.645 549 E – 01
yd <sup>3</sup> /min	cubic metre per second (m <sup>3</sup> /s)	1.274 258 E – 02
year (calendar)	second (s)	3.153 600 E + 07
year (sidereal)	second (s)	3.155 815 E + 07
year (tropical)	second (s)	3.155 693 E + 07

Table C-2. Temperature Conversion formular




<i>To convert from</i>	<i>to</i>	<i>Use formula</i>
Celsius temperature ( $t^{\circ}C$ )	Kelvin temperature ( $t_K$ )	$t_K = t^{\circ}C + 273.15$
Fahrenheit temperature ( $t^{\circ}F$ )	Celsius temperature ( $t^{\circ}C$ )	$t^{\circ}C = (t^{\circ}F - 32)/1.8$
Fahrenheit temperature ( $t^{\circ}F$ )	Kelvin temperature ( $t_K$ )	$t_K = (t^{\circ}F + 459.67)/1.8$
Kelvin temperature ( $t_K$ )	Celsius temperature ( $t^{\circ}C$ )	$t^{\circ}C = t_K - 273.15$
Rankine temperature ( $t^{\circ}R$ )	Kelvin temperature ( $t_K$ )	$t_K = t^{\circ}R/1.8$

 <p><b>NCAA</b> NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p><b>Namibia Civil Aviation Authority - Safety Division</b></p>	<p><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p><b>Part 2: UOM</b></p>
---	--	---

## **ATTACHMENT D COORDINATED UNIVERSAL TIME**

- 1.1 Coordinated Universal Time (UTC) will replace Greenwich Mean Time (GMT) as the accepted international standard for clock time. It will be the basis for civil time and will also be the time used in the worldwide time signal broadcasts used in aviation. The use of UTC is recommended by such bodies as the General Conference on Weights and Measures (CGPM), the International Radio Consultative Committee (CCIR) and the World Administration Radio Conference (WARC).
  
- 1.2 The basis for all clock time is the time of apparent rotation of the sun. This is, however, a variable quantity which depends, among other things, on where it is measured on earth. A mean value of this time, based upon measurements in a number of places on the earth, is known as Universal Time. A different time scale, based upon the definition of the second, is known as International Atomic Time (TAI). A combination of these two scales results in Coordinated Universal Time. This consists of TAI adjusted as necessary by the use of leap seconds to obtain a close approximation (always within 0.5 seconds) of Universal Time.

 <p><b>NCAA</b> NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p><b>Namibia Civil Aviation Authority - Safety Division</b></p>	<p><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p><b>Part 2: UOM</b></p>
---	--	---

**ATTACHMENT E**



## **PRESENTATION OF DATE AND TIME IN ALL-NUMERIC FORM**

### **1. Introduction**

The International Organization for Standardization (ISO) Standards 2014 and 3307 specify the procedures for writing the date and time in all-numeric form and ICAO will be using these procedures in its documents where appropriate in the future.

### **2. Presentation of date**

Where dates are presented in all-numeric form, ISO 2014 specifies that the sequence year-month-day should be used. The elements of the date should be:


— four digits to represent the year, except that the century digits may be omitted where no possible confusion could arise from such an omission. There is value in using the century digits during the period of familiarization with the new format to make it clear that the new order of elements is being used;

- two digits to represent the month;
- two digits to represent the day.

Where it is desired to separate the elements for easier visual understanding, only a space or a hyphen should be used as a separator.

As an example, 25 August 1983 may be written as:

- 19830825 or 830825
- or 1983-08-25 or 83-08-25
- or 1983 08 25 or 83 08 25.

 <p><b>NCAA</b> NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p align="center"><b>Namibia Civil Aviation Authority - Safety Division</b></p>	<p align="center"><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p align="center"><b>Part 2: UOM</b></p>
---	---	---

It should be emphasized that the ISO sequence should only be used where it is intended to use an all-numeric presentation. Presentations using a combination of figures and words may still be used if required (e.g. 25 August 1983).

### **3. Presentation of time**

- 3.1 Where the time of day is to be written in all-numeric form, ISO 3307 specifies that the sequence hours-minutes- seconds should be used.
- 3.2 Hours should be represented by two digits from 00 to 23 in the 24-hour timekeeping system and may be followed either by decimal fractions of an hour or by minutes and seconds. Where decimal fractions of an hour are used, the normal decimal separator should be used followed by the number of digits necessary to provide the required accuracy.
- 3.3 Minutes should likewise be represented by two digits from 00 to 59 followed by either decimal fractions of a minute or by seconds.
- 3.4 Seconds should also be represented by two digits from 00 to 59 and followed by decimal fractions of a second if required.
- 3.5 Where it is necessary to facilitate visual understanding a colon should be used to separate hours and minutes and minutes and seconds. For example, 20 minutes and 18 seconds past 3 o'clock in the afternoon may be written as:


152018 or 15:20:18 in hours, minutes and seconds

or 1520.3 or 15:20.3 in hours, minutes and decimal fractions of a minute

or 15.338 in hours and decimal fractions of an hour.

### **4. Combination date and time groups**

This presentation lends itself to a uniform method of writing date and time together where necessary. In such cases, the sequence of elements year-month-day-hour-minute-second should

 <p><b>NCAA</b> NAMIBIA CIVIL AVIATION AUTHORITY</p>	<p><b>Namibia Civil Aviation Authority - Safety Division</b></p>	<p><b>TECHNICAL STANDARDS (NAMCATS)</b></p> <p><b>Part 2: UOM</b></p>
---	--	---

be used. It may be noted that not all the elements need be used in every case — in a typical application, for example, only the elements day-hour-minute might be used.